


Dragon 3

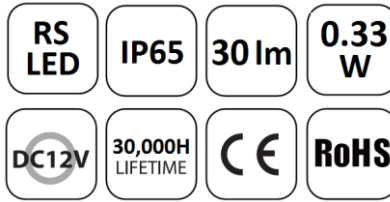


BEST FEATURES


- SAVING COST SOLUTION
- DESIGNED TO ILLUMINATE NARROW APPLICATIONS
- 120° ANGLE OF RADIATION
- IP65 INGRESS PROTECTION
- 3 YEARS WARRANTY @ L70

RECOMMENDED DEPTH FOR CHANNEL LETTERS70 mm – 120 mm

DIMENSIONS: units in mm

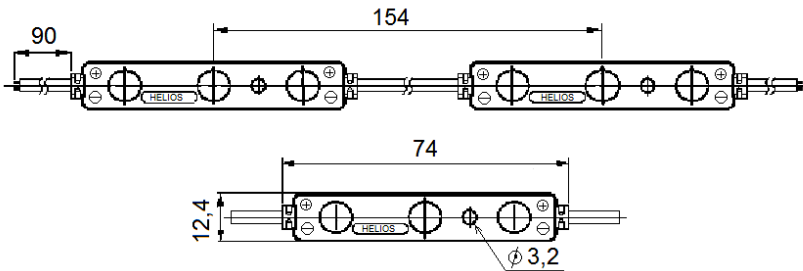

INTENSITY DISTRIBUTION CHART

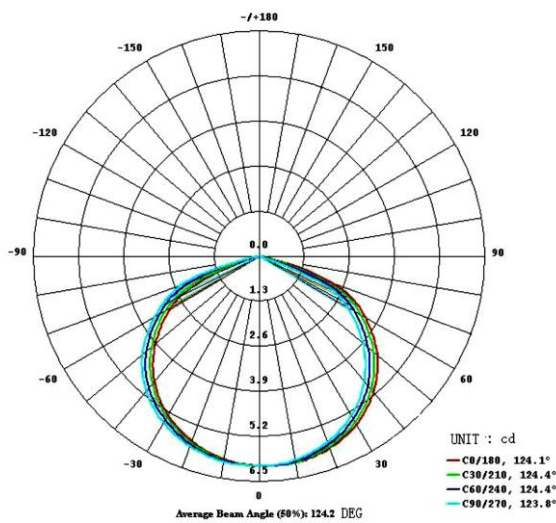

SPECIFICATIONS*:

Part number.....Dragon 3
 Input voltage.....12V DC
 Power consumption (typical).....0.33 Watt
 Drive current.....28 mA
 LED package.....2835
 Housing.....PVC

Lm per module (typical).....30 lm
 Viewing angle120°
 CRI (minimal).....75

Available colors
 Daylight white.....6,500 K

Max. allowed quantity in series.....**20 pcs**

Ingress protection.....IP 65
 Operating temperature - 25°C to +60°C

Meets the following standards:

EN 55015:2006+A1+A2
 EN 61547:2009;
 EN60598
 RoHS;
 TUV EN60598-1:2008+A11 (IP TEST)

Packaging

Anti - static bag100 pcs
 Master box2,000 pcs
 Master box G.W. 15,5 kg

*Technical data is subject to change without notice

Latvia
 SIA "TAMARS" (office & warehouse)
 Reģ. Nr.: 43603036217
 Adrese: 20 Braslas iela, Offis 115
 Rīga, LV-1084, Latvija
 Tel.: +371 67040635
 E-mail: info@ledunicom.lv
 www.ledunicom.lv

Belarus
 KIMIX LTD. (office & warehouse)
 VAT No. 100006365
 Legal address: 15 Zhilunovich str. off. 310
 Minsk, BY-220026, Belarus
 Tel.: +375 172950901
 E-mail: info@kimix.by
 www.kimix.by

Russia
 ООО «ХЕЛИОС ЛЕД»
 VAT No. 6732077309
 Legal address: 21A Bagration str.
 Smolensk, RU- 214025, Russia
 Tel.: +79267581371
 E-mail: Yurchenko@helios-led.com
 www.helios-led.com